

# Heathfield&Co

## Installation Guide

CEILING LIGHT | NULA VERTICAL



### General Notes



- Before carrying out installation, please ensure that you have read and understood this document carefully.
- This fitting is low voltage and must be connected to a constant voltage LED driver when installing on a mains voltage circuit. Do not connect this fitting directly to a mains voltage circuit.
- The LED driver is supplied and contained within the ceiling rose.
- This fitting contains an integrated LED light source. Do not attempt to replace the lamp. In case of failure, please contact our sales team.
- This fitting is IP44 rated, suitable for use in bathrooms. Please refer to our bathroom guide for more information: [heathfield.co.uk/stories/lighting-guide-the-bathroom](http://heathfield.co.uk/stories/lighting-guide-the-bathroom)
- An IP rated terminal block must be used in this fitting for use in a bathroom.
- Switch off electricity and ensure the correct wiring procedure & regulations have been checked with a qualified electrician.
- Ensure the fitting is being fixed to a suitable surface, strong enough to support the weight of the product.
- Ensure that suitable fixings are used - additional fixing screws are not included.
- The ceiling mount and fixing screws are supplied already attached to the fitting.
- Save these instructions for future reference.
- If you have any additional questions, please contact our sales team.

### Caution

Installation of this fitting must be carried out by a qualified electrician.

### Warning

Electricity must be switched off at the mains fuse box before installing this fitting.



Ceiling Mount  
x1



Fixing Screws  
x2



Nula Vertical  
x1

H&  
CO


LIGHT BEYOND DESIGN

[www.heathfield.co.uk](http://www.heathfield.co.uk) | +44 (0) 1732 350450 | [sales@heathfield.co.uk](mailto:sales@heathfield.co.uk)  
Unit 1, Priory Road, Tonbridge, Kent, TN9 2AF, United Kingdom. © 2026 Heathfield & Co. All rights reserved.

# Heathfield&Co


## Installation Guide

CEILING LIGHT | NULA VERTICAL






### STEP 1

- Switch off the electricity at the mains fuse box. Turning off the power at the switch is not sufficient.
- Remove the 2x fixing screws to separate the ceiling mount from the ceiling rose.



### STEP 2

- Fix the ceiling mount to the ceiling using appropriate fixings.
- Make electrical connections, following the below wiring diagram. Please note you will need to hold the weight of the pendant while connecting the wires.

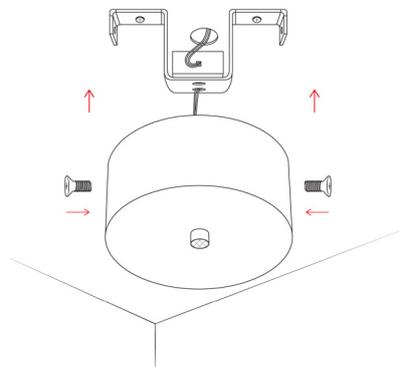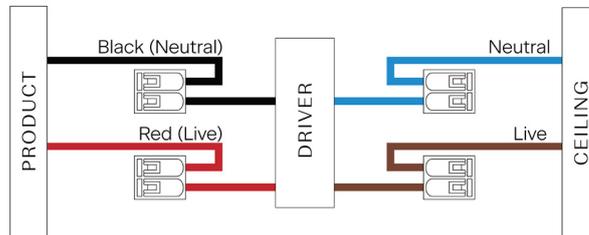

### STEP 3

- Offer the ceiling light up to the ceiling mount & screw the fixing screws into the ceiling rose.
- Switch the power back on.


H&  
CO

LIGHT BEYOND DESIGN

# Heathfield&Co

## Installation Guide

CEILING LIGHT | NULA VERTICAL

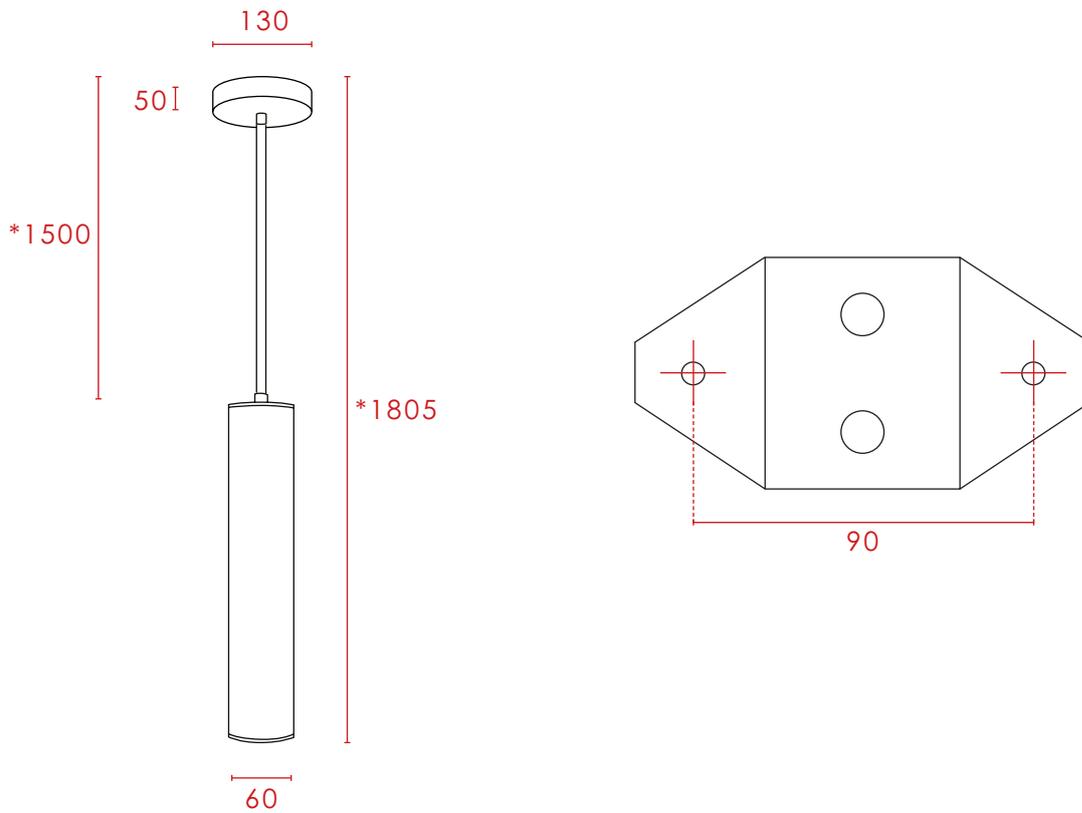

Dimensions in mm and approximate.

\*Flex drop length adjustable.

H&  
CO

LIGHT BEYOND DESIGN

[www.heathfield.co.uk](http://www.heathfield.co.uk) | +44 (0) 1732 350450 | [sales@heathfield.co.uk](mailto:sales@heathfield.co.uk)  
Unit 1, Priory Road, Tonbridge, Kent, TN9 2AF, United Kingdom. © 2026 Heathfield & Co. All rights reserved.

# Heathfield&Co

## Installation Guide

CEILING LIGHT | NULA 3 LIGHT



### General Notes



- Before carrying out installation, please ensure that you have read and understood this document carefully.
- This fitting is low voltage and must be connected to a constant voltage LED driver when installing on a mains voltage circuit. Do not connect this fitting directly to a mains voltage circuit.
- The LED driver is supplied and contained within the ceiling rose.
- This fitting contains an integrated LED light source. Do not attempt to replace the lamp. In case of failure, please contact our sales team.
- This fitting is suitable for dry, indoor use only.
- Switch off electricity and ensure the correct wiring procedure & regulations have been checked with a qualified electrician.
- Ensure the fitting is being fixed to a suitable surface, strong enough to support the weight of the product.
- Ensure that suitable fixings are used - additional fixing screws are not included.
- The ceiling mount and fixing screws are supplied already attached to the fitting.
- Save these instructions for future reference.
- If you have any additional questions, please contact our sales team.

### Caution


Installation of this fitting must be carried out by a qualified electrician.

### Warning


Electricity must be switched off at the mains fuse box before installing this fitting.



Ceiling Mount  
x1



Fixing Screws  
x3



Nula 3 Cluster  
x1

H&  
CO


LIGHT BEYOND DESIGN

www.heathfield.co.uk | +44 (0) 1732 350450 | sales@heathfield.co.uk  
Unit 1, Priory Road, Tonbridge, Kent, TN9 2AF, United Kingdom. © 2026 Heathfield & Co. All rights reserved.

# Heathfield&Co


## Installation Guide

CEILING LIGHT | NULA 3 LIGHT





### STEP 1

- Switch off the electricity at the mains fuse box. Turning off the power at the switch is not sufficient.
- Loosen the screws then twist & lift off the front ceiling rose. Please note you should not remove the screws fully.



### STEP 2

- Fix the ceiling mount using appropriate fixings.

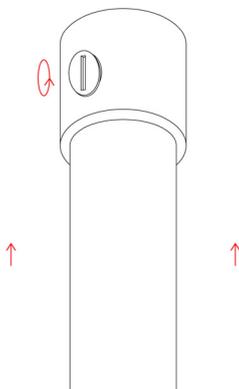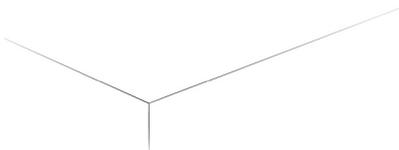

### STEP 3

- If you need to adjust any of the lengths of the pendants, slightly loosen the cord grip screws using a flat head screwdriver. Please note you should not remove screws fully.
- Gently pull the flex through at the top of the ceiling rose until you have reached the desired length.
- If you do not need to adjust the lengths please skip step 3 and 4.

H&  
CO


LIGHT BEYOND DESIGN

[www.heathfield.co.uk](http://www.heathfield.co.uk) | +44 (0) 1732 350450 | [sales@heathfield.co.uk](mailto:sales@heathfield.co.uk)  
Unit 1, Priory Road, Tonbridge, Kent, TN9 2AF, United Kingdom. © 2026 Heathfield & Co. All rights reserved.

# Heathfield&Co


## Installation Guide

CEILING LIGHT | NULA 3 LIGHT

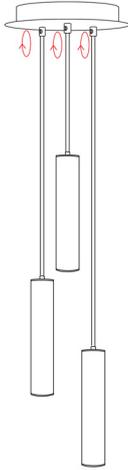



### STEP 4

- Once the flex lengths have been adjusted, tighten the cord grip screws.
- If there are any flex cords sticking out at the top of the ceiling rose, push them back in so they sit below the very top edge of the ceiling rose.

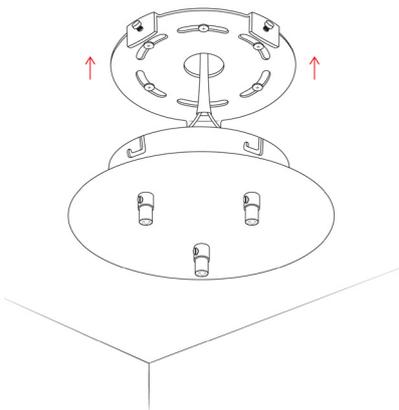

### STEP 5

- Offer the ceiling light up to the ceiling mount & make electrical connections, following the below wiring diagram. Please note you will need to hold the weight of the pendant while connecting the wires.
- Twist & lock the ceiling rose onto to ceiling mount & tighten screws.

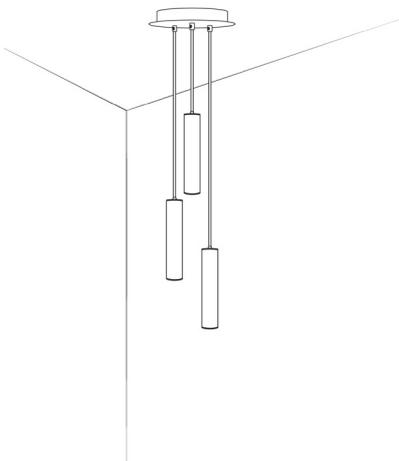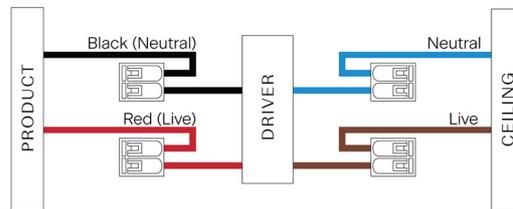

### STEP 6

- Switch the power back on.

H&  
CO


LIGHT BEYOND DESIGN

www.heathfield.co.uk | +44 (0) 1732 350450 | sales@heathfield.co.uk  
Unit 1, Priory Road, Tonbridge, Kent, TN9 2AF, United Kingdom. © 2026 Heathfield & Co. All rights reserved.

# Heathfield&Co

## Installation Guide

CEILING LIGHT | NULA 3 LIGHT

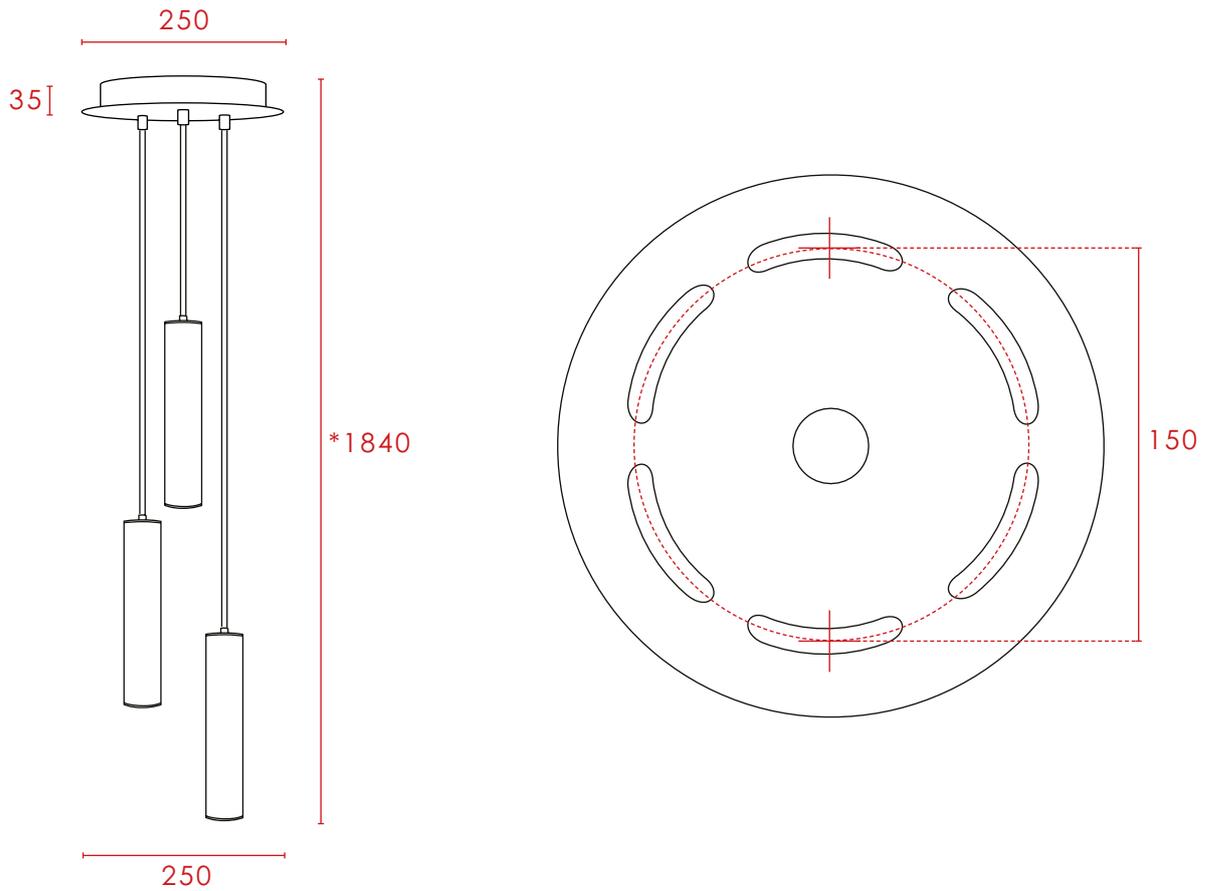

Dimensions in mm and approximate.

\*Flex drop length adjustable.

**H&  
CO**

LIGHT BEYOND DESIGN

[www.heathfield.co.uk](http://www.heathfield.co.uk) | +44 (0) 1732 350450 | [sales@heathfield.co.uk](mailto:sales@heathfield.co.uk)  
Unit 1, Priory Road, Tonbridge, Kent, TN9 2AF, United Kingdom. © 2026 Heathfield & Co. All rights reserved.

# Heathfield&Co

## Installation Guide

CEILING LIGHT | NULA 5 LIGHT



### General Notes


- Before carrying out installation, please ensure that you have read and understood this document carefully.
- This fitting is low voltage and must be connected to a constant voltage LED driver when installing on a mains voltage circuit. Do not connect this fitting directly to a mains voltage circuit.
- The LED driver is supplied and contained within the ceiling rose.
- This fitting contains an integrated LED light source. Do not attempt to replace the lamp. In case of failure, please contact our sales team.
- This fitting is suitable for dry, indoor use only.
- Switch off electricity and ensure the correct wiring procedure & regulations have been checked with a qualified electrician.
- Ensure the fitting is being fixed to a suitable surface, strong enough to support the weight of the product.
- Ensure that suitable fixings are used - additional fixing screws are not included.
- The ceiling mount and fixing screws are supplied already attached to the fitting.
- Save these instructions for future reference.
- If you have any additional questions, please contact our sales team.

### Caution


Installation of this fitting must be carried out by a qualified electrician.

### Warning


Electricity must be switched off at the mains fuse box before installing this fitting.



Ceiling Mount  
x1



Fixing Screws  
x3



Nula 5 Cluster  
x1

H&  
CO


LIGHT BEYOND DESIGN

www.heathfield.co.uk | +44 (0) 1732 350450 | sales@heathfield.co.uk  
Unit 1, Priory Road, Tonbridge, Kent, TN9 2AF, United Kingdom. © 2026 Heathfield & Co. All rights reserved.

# Heathfield&Co


## Installation Guide

CEILING LIGHT | NULA 5 LIGHT





### STEP 1

- Switch off the electricity at the mains fuse box. Turning off the power at the switch is not sufficient.
- Loosen the screws then twist & lift off the front ceiling rose. Please note you should not remove the screws fully.



### STEP 2

- Fix the ceiling mount using appropriate fixings.

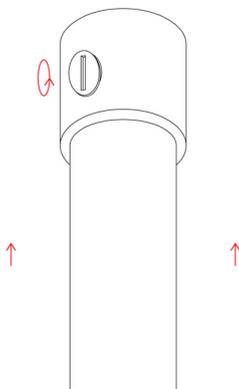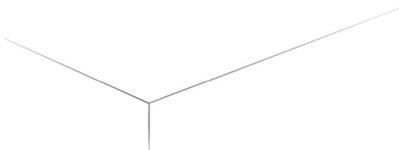

### STEP 3

- If you need to adjust any of the lengths of the pendants, slightly loosen the cord grip screws using a flat head screwdriver. Please note you should not remove screws fully.
- Gently pull the flex through at the top of the ceiling rose until you have reached the desired length.
- If you do not need to adjust the lengths please skip step 3 and 4.

H&  
CO


LIGHT BEYOND DESIGN

[www.heathfield.co.uk](http://www.heathfield.co.uk) | +44 (0) 1732 350450 | [sales@heathfield.co.uk](mailto:sales@heathfield.co.uk)  
Unit 1, Priory Road, Tonbridge, Kent, TN9 2AF, United Kingdom. © 2026 Heathfield & Co. All rights reserved.

# Heathfield&Co


## Installation Guide

CEILING LIGHT | NULA 5 LIGHT

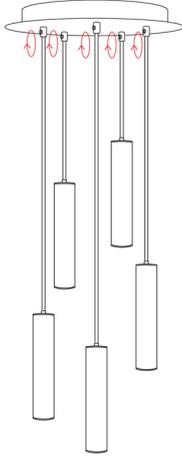



### STEP 4

- Once the flex lengths have been adjusted, tighten the cord grip screws.
- If there are any flex cords sticking out at the top of the ceiling rose, push them back in so they sit below the very top edge of the ceiling rose.

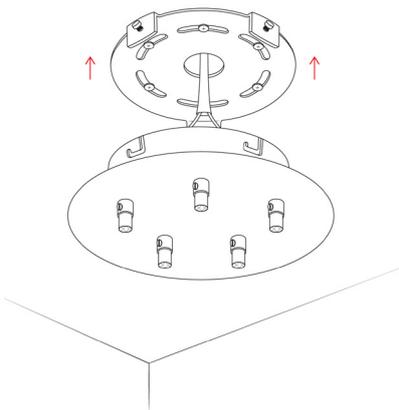

### STEP 5

- Offer the ceiling light up to the ceiling mount & make electrical connections, following the below wiring diagram. Please note you will need to hold the weight of the pendant while connecting the wires.
- Twist & lock the ceiling rose onto to ceiling mount & tighten screws.

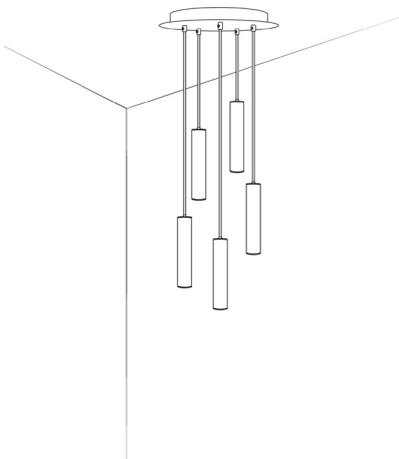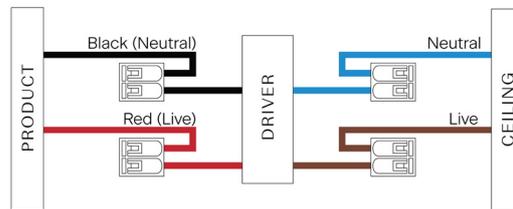

### STEP 6

- Switch the power back on.

H&  
CO


LIGHT BEYOND DESIGN

www.heathfield.co.uk | +44 (0) 1732 350450 | sales@heathfield.co.uk  
Unit 1, Priory Road, Tonbridge, Kent, TN9 2AF, United Kingdom. © 2026 Heathfield & Co. All rights reserved.

# Heathfield&Co

## Installation Guide

CEILING LIGHT | NULA 5 LIGHT

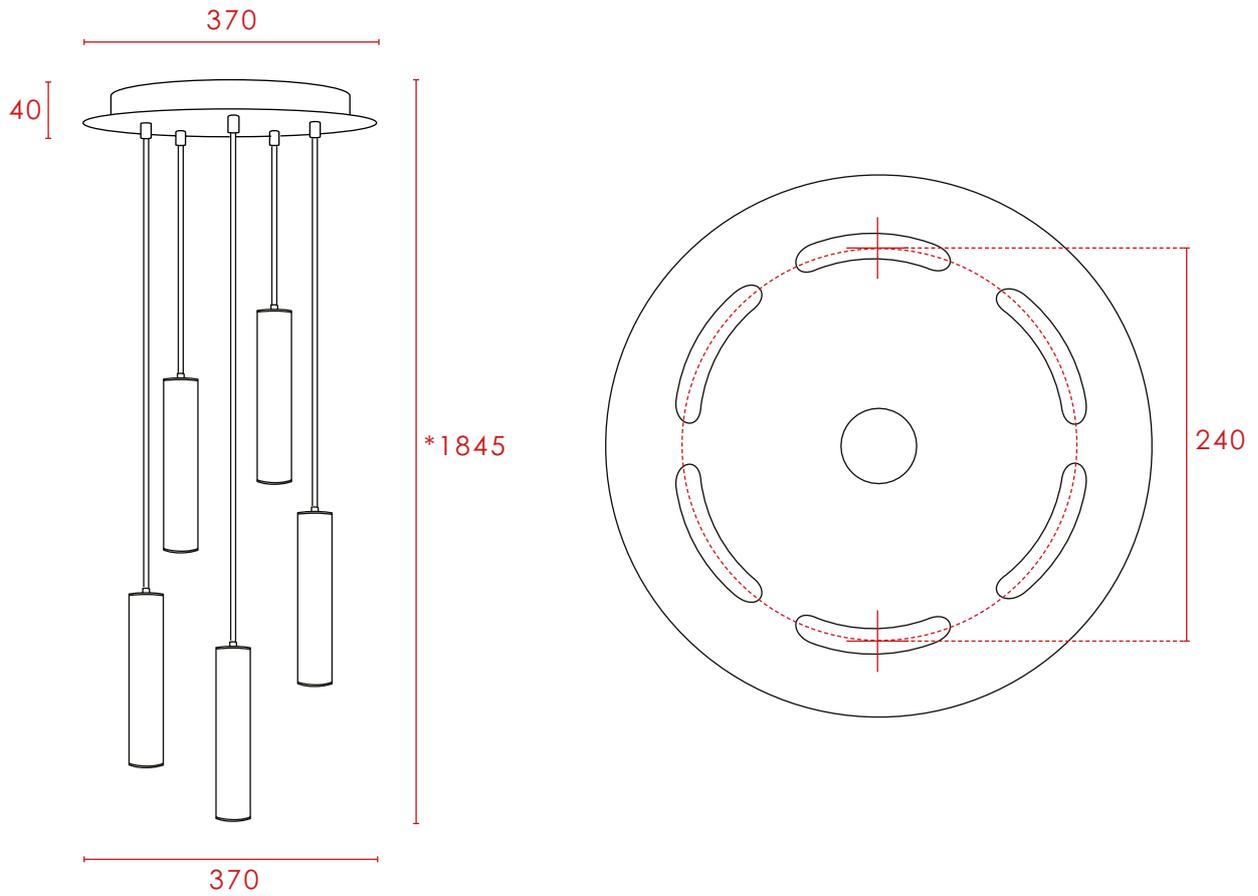

Dimensions in mm and approximate.

\*Flex drop length adjustable.

**H&  
CO**

LIGHT BEYOND DESIGN

[www.heathfield.co.uk](http://www.heathfield.co.uk) | +44 (0) 1732 350450 | [sales@heathfield.co.uk](mailto:sales@heathfield.co.uk)  
Unit 1, Priory Road, Tonbridge, Kent, TN9 2AF, United Kingdom. © 2026 Heathfield & Co. All rights reserved.